


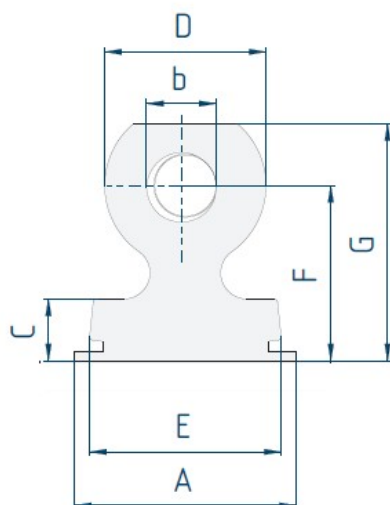

St.
Sinerstahl

Gewinde thread	Mindestblechstärke Min. sheet thickness	Lochmaße hole dimensions (+0.05/ -0.03)	Länge Length L (±0.08)	min. Randabstand min. distance to edge I	min. Randabstand min. distance to edge H
M3x0,5	1	8 x 3 8 x 4 8 x 6	2,89 3,89 5,89	1,02	7,6 9,1 10,7
M4x0,7	1	10 x 4 10 x 7 10 x 9	3,89 6,89 8,89	1,02	10,0 14,7 16,3

Gewinde thread	A (±0.15)	Ø b (±0.10)	C	D	E (±0.08)	F (±0.15)	G
M3x0,5	9,47	M3	3,18	6,35	7,89	7	9,27
M4x0,7	11,43	M4	3,18	8,89	9,89	9	12,19

Alle Angaben in mm / all specifications in mm

Spezifikationen können ohne vorherige Ankündigung geändert werden. / Specifications subject to change without notice.

Bolzen in Aluminium, geeignet für Blechwerkstoffe mit max. 60 HRB / Clinching aluminium studs suitable for sheets with max. 60 HRB.