


Blindnietmuttern / blind rivet nuts

Mikrosenkopf und Sechskantschaft /
small countersunk head with hexagon body

HRUSCHKA

BOLZENSCHWEISSTECHNIK - STUD WELDING

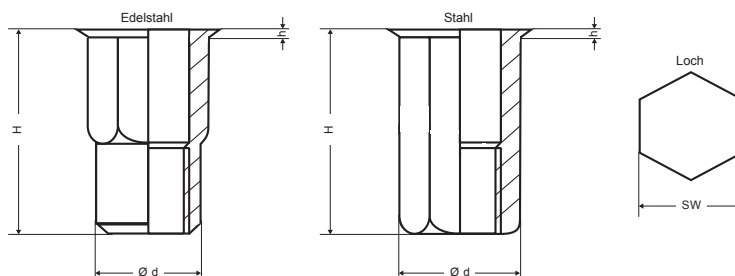

Alle Angaben in mm / All specifications in mm

St

Gewinde	Klemmbereich	SW	H	d (±0.1)	D	h
M4	0,5 - 2,5mm	6	11,0	5,9	7,0	0,5
	2,5 - 5,0mm		13,5			
M5	0,5 - 3,0mm	7	14,5	6,9	8,0	0,5
	3,0 - 5,0mm		16,0			
M6	1,0 - 3,5mm	9	16,0	8,9	10,0	0,6
	3,5 - 6,0mm		18,0			
M8	1,0 - 4,0mm	11	18,0	10,9	12,0	0,65
	4,0 - 6,0mm		20,0			
M10	1,0 - 3,5mm	13	19,0	12,9	14,5	0,7
	3,5 - 6,0mm		23,5			

A2

Gewinde	Klemmbereich	SW	H	d (±0.1)	D	h
M3	0,5 - 1,5mm	5	9,0	5,9	5,6	0,35
M4	0,5 - 2,0mm	6	12,0	5,9	7,0	0,5
M5	0,5 - 3,0mm	7	13,0	6,9	8,0	0,5
	3,0 - 5,0mm		14,0		7,5	
M6	0,5 - 3,0mm	9	16,0	8,9	10,0	0,6
	3,0 - 5,0mm		16,5		9,5	
M8	1,0 - 3,5mm	11	17,5	10,9	12,0	0,65
	1,5 - 4,5mm		18,0		12,0	0,50
	3,0 - 5,5mm		18,5		11,5	0,65
M10	1,0 - 4,0mm	13	21,0	12,9	14,5	0,7

A4

Gewinde	Klemmbereich	SW	L	d (±0.1)	D	h
M4	0,5 - 2,0mm	6	11,0	6,0	6,5	0,5
M5	0,5 - 3,0mm	7	12,0	7,0	7,5	0,5
M6	0,5 - 3,0mm	9	14,5	9,0	9,5	0,6
M8	0,5 - 3,0mm	11	16,0	11,0	11,5	0,7

AISI 316 CU/1.4578

Andere Abmessungen, Gewinde und Werkstoffe auf Anfrage. / Other dimensions, threads and materials upon consultation.